




Photo

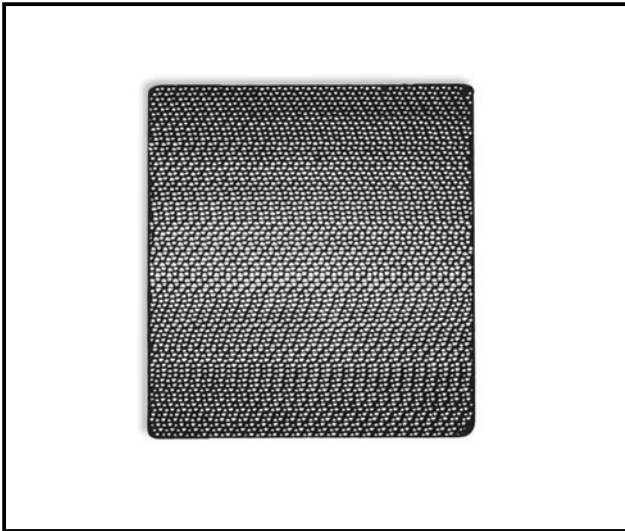

Descriptions

A ceramic filter equipped with newly developed nano-hole manganese catalyst.
 Engineered for streamlined catching and crushing of odor-causing elements over an impressive surface area of 1750m² (approx. 7 tennis courts).

Applicable Models


- MSZ-FA25VA
- MSZ-FA35VA

Specifications

Material	Aluminum oxide, Silicon dioxide, Manganese dioxide, Cupric dioxide
Color	Black

Dimensions

Unit : mm

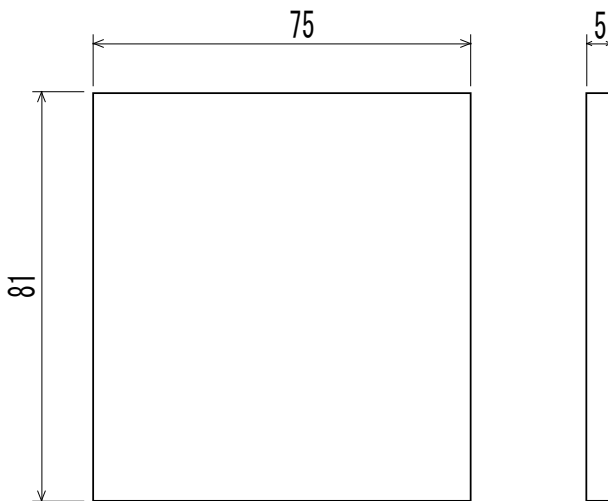


How to Use / How to Install


CAUTION

- Carefully handle the deodorizing ceramic filter as the filter is fragile.


REPLACEMENT OF THE DEODORIZING CERAMIC FILTER




① Release the two knobs to open the PLASMA DEODORIZING filter unit.




② Pull the side knobs outward and then forward to remove, as illustrated above.




③ Pull out the deodorizing ceramic filter from the side of the unit.



④ Insert the new deodorizing ceramic filter from the side of the unit.



⑤ Put back the side knobs to the original position.



⑥ Put back the two knobs to the original position.

CAUTION:

- Install the deodorizing ceramic filter correctly.
- Touching the filter directly can cause the stain on your hands.
- The PLASMA DEODORIZING filter unit may not operate properly if the deodorizing ceramic filter is not installed. Be sure to install the deodorizing ceramic filter.